

## TOSF-10 QUAD SYSTEM

(1) 310318 - SFES PRO, Quad Head (4) 310372 - SFES PRO, TOSF-10 Cartridge

## System Summary

The **SFES PRO** TOSF-10 Quad System provides excellent sediment filtration, chlorine removal and mineral scale control for water-fed equipment such as ice machines, coffee/tea machines, bakery equipment, etc.

The system utilizes a premium high grade carbon block filter that specializes in higher sediment loading capacity.

The TOSF-10 Quad System also incorporates the patented HydroBlend<sup>™</sup>/ScaleStick<sup>™</sup> scale control insert providing unparalleled mineral scale prevention and corrosion control for predictable treatment periods.



### **Benefits**

Mineral scale buildup responsible for increased maintenance is reduced

Removes sediment that causes cloudy ice and plugs distribution tubes and float valves

Energy efficiency and machine life are increased while reducing costly service calls

Removes chlorine to improve taste and reduce potential corrosion issues

#### **Features**

Bayonet style quick disconnect cartridge makes filter replacement sanitary, quick and easy

Compact design facilitates system placement and installation

HydroBlend<sup>™</sup>/ScaleStick<sup>™</sup> insert provides optimum scale prevention and a consistent feed throughout the life of the cartridge

NSF Certified under Standard 42

Installation Summary	<b>Operating Tips</b>	Application
Place system in an accessible location for ease of filter replacement	Recommended cartridge replacement every 6 months	Ice Machines
,	,	Coffee/Tea Equipment
Ensure that the system is mounted vertically with a minimum of 2" clearance from the bottom of the system to allow for filter replacement		Proofers, Deck/Rack Ovens
Cold water inlet feed only		

Do not over tighten fittings



# TOSF-10 QUAD SYSTEM

(1) 310318 - SFES PRO, Quad Head (4) 310372 - SFES PRO, TOSF-10 Cartridge

## **System Specifications**

**Rated Service Flow** 6.0 gpm. (22.71 lpm.)

**Rated Capacity** 30,000 gal. (Chlorine Removal)

**Operating Pressure** 30 - 125 psi. (2 - 8.6 bar) non-shock

**Operating Temperature** 35° - 100°F (2° - 38°C)

Connection Size 1/2" MNPT

**Shipping Weight** 12 lbs.

**System Dimensions** 15.25" x 19" x 4" (HxWxD)


\*Width w/ 1/2" Male Fittings: 21" \*Width w/ 1/2" Cross Kit: 23"

#### Warranty

**PRO** systems are covered by a limited warranty against defects in material or workmanship for a period of 1 year after the date of purchase.

**PRO** replacement filters are covered by a limited warranty against defects in material or workmanship for a period of 1 year after the date of purchase.

Please call 1-800-935-8500 for further warranty information.

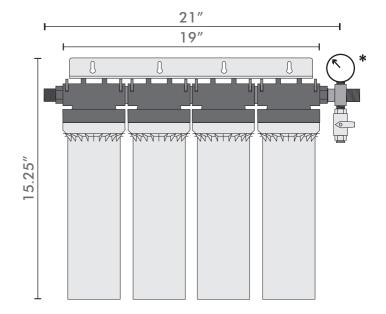

**Replacement Filter(s)** (4) 310372 - PRO TOSF-10 Cartridge

\* Additional Accessory

 (1) 310332 - 1/2" Cross Kit w/ Valve & Gauge

## **Additional Info**

Do not use with water that is microbiologically unsafe or unknown quality without adequate disinfection before or after the system

System should be installed in compliance with state and local laws and regulations.



System Tested and Certified by NSF International against ANSI/NSF Standard 42 for the reduction of Chlorine, Taste and Odor.