

TO-SSQD 10 QUAD COMBO

Item # 310406

System Summary

The **SFES PRO** TO-SSQD 10 Quad Combo System provides excellent sediment filtration, chlorine removal and mineral scale control. The Combo System is specifically designed to feed multiple pieces of equipment where different treatment requirements are needed.

The system utilizes a premium high grade carbon block filter ensuring high flow rates and treatment volumes.

The TO-SSQD 10 Quad Combo System also incorporates the patented HydroBlend[™]/ScaleStick[™] scale control providing unparalleled mineral scale prevention and corrosion control for predictable treatment periods.



Benefits

Mineral scale buildup responsible for increased maintenance is reduced

Removes sediment that causes cloudy ice and plugs distribution tubes and float valves

Energy efficiency and machine life are increased while reducing costly service calls

Removes chlorine to improve taste and reduce potential corrosion issues

Features

Bayonet style quick disconnect cartridge makes filter replacement sanitary, quick and easy

Compact design facilitates system placement and installation

HydroBlend[™]/ScaleStick[™] provides optimum scale prevention and a consistent feed throughout the life of the cartridge

Dual outlets with one dedicated to protecting equipment that is susceptible to scale buildup

Installation Summary	Operating Tips	Application
Place system in an accessible location for ease of filter replacementRecommended cartridge replacement every 6 monthsEnsure that the system is mounted vertically with a minimum of 2" clearance from the bottom of thePlace system is mounted the system is mount	Whole Store Filtration	
	1 /	Ice Machines
		Beverage Systems
system to allow for filter replacement		Cooking Equipment
Cold water inlet feed only		

Do not over tighten fittings



TO-SSQD 10 QUAD COMBO

Item # 310406

System Specifications

Rated Service Flow 4.95 gpm. (18.73 lpm.)

Rated Capacity 30,000 gal. (Chlorine Removal)

Operating Pressure/Temperature 30 - 125 psi. (2 - 8.6 bar) non-shock 35° - 100°F (2° - 38°C)

Connection Size 1/2" MNPT

System Dimensions 20.85" x 21" x 4" (HxWxD)

*Width w/ 1/2" Cross Kit: 23"

Replacement Filter(s) (3) 310360 - PRO TO-10 Cartridge (1) 310390 - PRO SS-QD Cartridge


* Additional Accessory (1) 310332 - 1/2" Cross Kit w/ Valve & Gauge


Warranty

PRO systems are covered by a limited warranty against defects in material or workmanship for a period of 1 year after the date of purchase.

PRO replacement filters are covered by a limited warranty against defects in material or workmanship for a period of 1 year after the date of purchase.

Please call 1-800-935-8500 for further warranty information.

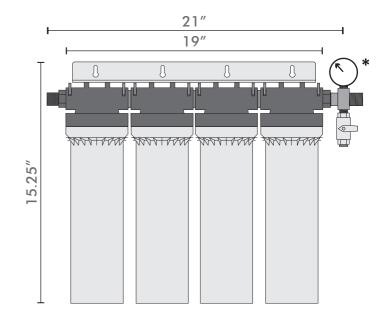



(1) Outlet w/o Scale Control

(2) Outlet with Scale Control

Additional Info

Do not use with water that is microbiologically unsafe or unknown quality without adequate disinfection before or after the system

System should be installed in compliance with state and local laws and regulations.