

TO-16 TRIPLE SYSTEM

- (1) 310315 SFES PRO, Triple Head
- (3) 310364 SFES PRO, TO-16 Cartridge

System Summary

The **SFES PRO** TO-16 Triple System provides excellent sediment filtration and chlorine removal for beverage related equipment such as soda systems, juice machines and drinking water

The system utilizes a premium high grade carbon block filter for high flow rates and treatment volumes ensuring great tasting drinking water and beverages.



Benefits

Consistent high quality and great tasting beverages

Reduced costs since costly over compensation of syrup is not needed to mask chlorine taste

Higher beverage carbonation increasing effervescence helping eliminate flat drinks

Do not over tighten fittings

Features

Bayonet style quick disconnect cartridge makes filter replacement sanitary, quick and easy

Compact design facilitates system placement and installation

NSF Certified under Standard 42

Installation Summary	Operating Tips	Application
Place system in an accessible location for ease of filter replacement	Recommended cartridge replacement every 6 months	Drinking Water
	representation every a mermic	Soda Systems
Ensure that the system is mounted		,
vertically with a minimum of 2"		Juice Machines
clearance from the bottom of the		
system to allow for filter replacement		
Cold water inlet feed only		



TO-16 TRIPLE SYSTEM

- (1) 310315 SFES PRO, Triple Head
- (3) 310364 SFES PRO, TO-16 Cartridge

System Specifications

Rated Service Flow

6.0 gpm. (22.7 lpm.)

Rated Capacity

45,000 gal. (Chlorine Removal)

Operating Pressure

30 - 125 psi. (2 - 8.6 bar) non-shock

Operating Temperature

35° - 100°F (2° - 38°C)

Connection Size

1/2" MNPT

Shipping Weight

9 lbs.

System Dimensions

20.85" x 14" x 4" (HxWxD)

*Width w/ 1/2" Male Fittings: 16"


*Width w/ 1/2" Cross Kit: 18"

Warranty

PRO systems are covered by a limited warranty against defects in material or workmanship for a period of 1 year after the date of purchase.

PRO replacement filters are covered by a limited warranty against defects in material or workmanship for a period of 1 year after the date of purchase.

Please call 1-800-935-8500 for further warranty information.

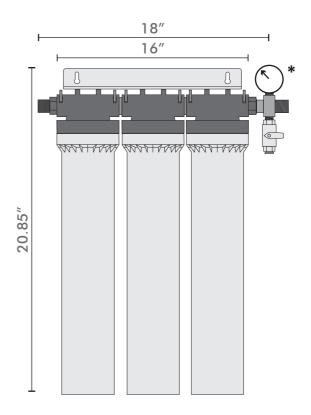

Replacement Filter(s)

(3) 310364 - PRO TO-16 Cartridge

* Additional Accessory

(1) 310332 - 1/2" Cross Kit w/ Valve & Gauge

Additional Info

Do not use with water that is microbiologically unsafe or unknown quality without adequate disinfection before or after the system

System should be installed in compliance with state and local laws and regulations.



System Tested and Certified by NSF International against ANSI/NSF Standard 42 for the reduction of Chlorine, Taste and Odor.